


Say a program was run like this: `./prog hi`

`argc` is 2

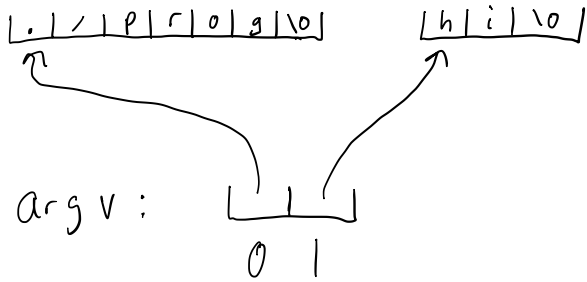

`argv[1][0]` is 'h'

`argv[1]` is "hi"